


# Manual barriers

up to 7,500mm effective boom length



Stabilization rope for EH 55L and up

## Locking devices

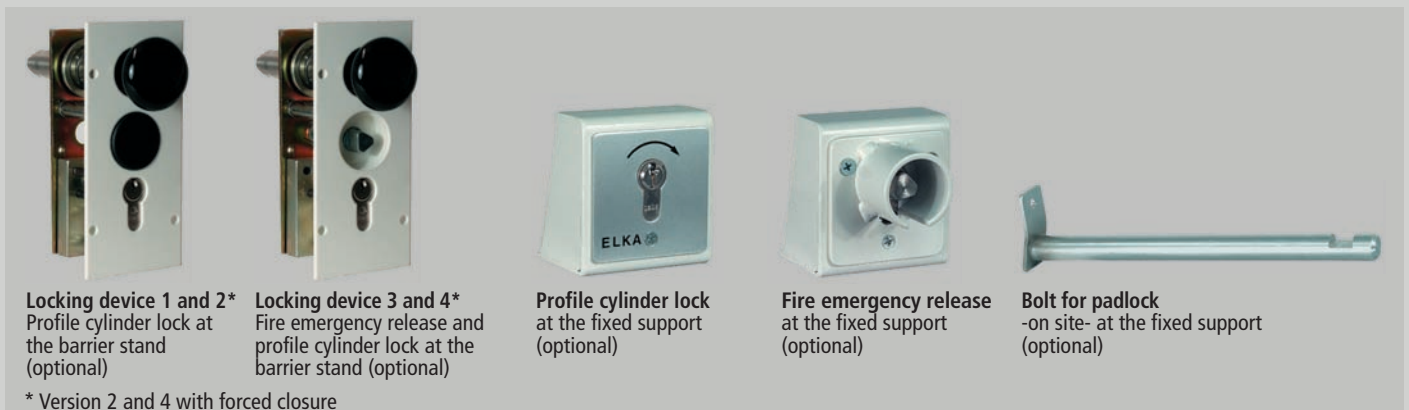

Locking device 1 and 2\*  
Profile cylinder lock at  
the barrier stand  
(optional)

Locking device 3 and 4\*  
Fire emergency release and  
profile cylinder lock at the  
barrier stand (optional)

Profile cylinder lock  
at the fixed support  
(optional)

Fire emergency release  
at the fixed support  
(optional)

Bolt for padlock  
-on site- at the fixed support  
(optional)

\* Version 2 and 4 with forced closure

## Barrier stand

made of galvanised steel, RAL 3002

## Catch-bolt

for automatic blocking

## Barrier boom

Made of aluminium, powder coated, white RAL 9010, with red reflective stripes, rubber tube on the underside

## Usage left/right

General technical data	EH 25L	EH 30L	EH 35L	EH 40L	EH 45L	EH 50L	EH 55L	EH 60L	EH 65L	EH 70L	EH 75L
Effective boom length (mm)	2,500	3,000	3,500	4,000	4,500	5,000	5,500	6,000	6,500	7,000	7,500
Boom dimensions (mm)	100x50										
Boom weight (kg)	5.3	6.4	7.4	8.4	9.5	10.5	16.6	17.6	18.7	19.7	20.7
Stabilization rope/boom	no						yes				
Swinging support or fixed support	optional			required							
Counterweights (quantity)	0	2	2	2	4	6	12	14	16	18	20